


ROWN Push-Pull Controls



OPERATING THROTTLES
CHOKES
HEATER AND WATER VALVES
HOOD RELEASES
HYDRAULIC AND MIXING VALVES
POWER TAKE-OFFS
DAMPER CONTROLS
STARTER SWITCHES
GEAR CHANGERS
SHUTTER AND SPEED REDUCERS

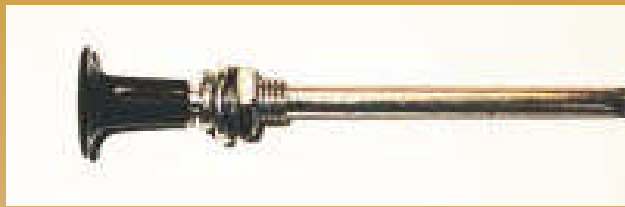

21 Series

UTILITY

Knob 7/8" black "ABS" plastic. Conduit/casing 13/64" galvanized. Core wire .054" DIA. stainless steel. Mounting thread body 3/8"-24 NF. Stroke or travel 2"-2 1/4".

Stocked Lengths:
5 Ft., 8 Ft., 10 Ft., 15 Ft.



35 Series

UTILITY/STAMPED

Knob 7/8" black "ABS" plastic. Conduit/casing 13/64" galvanized steel. Core wire .054" DIA. stainless steel. Mounting thread body 3/8"-24 NF. Stroke or travel 2"-2 1/4". 35-C is for choke stamped "C", 35-T is for throttle stamped "T".

Stocked Lengths:
5 Ft.



39 Series

STANDARD DUTY

Knob 7/8" black "ABS" plastic. Conduit/casing 13/64" galvanized steel with vinyl covering. Core wire .054" DIA. stainless steel. Mounting thread body 3/8"-24 NF.

Stocked Lengths:
5 Ft., 10 Ft.



54 Series

TURN-TO LOCK

2" T-Handle zinc die cast chrome plated. Conduit/casing 3/16" galvanized vinyl covered. Core wire .054" DIA. stainless steel. Mounting thread body 7/16"-20. Stroke or travel 2".

Stocked Lengths:
5 Ft., 9 Ft., 15 Ft., 25 Ft.



55 Series

HEAVY DUTY TURN-TO LOCK

T-Handle 3" chrome plated. Conduit/casing 5/16" with medium density polyethylene cover. Core wire .062" DIA. stainless steel. Mounting thread body 3/4"-16. Stroke or travel 5".

Stocked Lengths:
9 Ft., 15 Ft., 25 Ft.



56 Series

DELUXE

2" Zinc die cast chrome plated knob. Balance of specifications same as 39 Series with vinyl covered casing.

Stocked Lengths:
8 Ft., 15 Ft.




57 Series

HEAVY DUTY/PTO

2" Solid round or flat knob with thread size 3/8"-24 NF. Double wound conduit casing/Chelsea, Dana, Muncie type with vinyl cover. Core wire .088" DIA. stainless steel. Mounting thread body 1/2"-20. Stroke or travel 4 1/2" max. Available with PTO on knob.

Stocked Lengths:
5 Ft., 10 Ft., 15 Ft., 20 Ft.

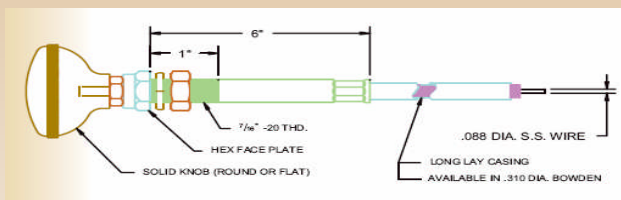

57 Long Lay Series

HEAVY DUTY/LONG LAY PTO

Similar to 57 series. Polyethylene coated/lined, low effort casing. Available with PTO on knob.

Stocked Lengths:
10 Ft., 15 Ft.



58 Series

SUPER LOCKING VERNIER

2" Black knob scalloped fine adjustment with 1" red course adjustment. 3/8" plunger with staked ball. Conduit casing 5/16" steel with vinyl cover. Core wire .062" DIA. stainless steel. Mounting thread body 3/4"-16. Stroke or travel 3".

Stocked Lengths:
5 Ft., 10 Ft., 15 Ft., 20 Ft., 25 Ft.



59 Series

PIN LOCK/SAFETY

2" T-Handle standard chrome plated zinc die cast knob. Conduit/casing 3/16" vinyl covered. Core wire .054" DIA. stainless steel. Mounting thread body 7/16"-20. Stroke or travel 2". Control operates in full on or full off position. Eliminates inadvertent operation.

Stocked Lengths:
10 Ft., 15 Ft.



Brass Wire Stop
C9



Clevis Yoke Cotter, Pin,
Assembly
C14



Wire Stop
C61



Connector Universal Fitting
C62



Mounting Clamp
C63



Connector Fitting
C66



Molded Knobs
C67, C69, and C70
C72 (Red Only)



C68 and C71
(Red Only)



*All controls may be shortened. Special Automotive, Marine and Industrial Cables available upon request.
All written and visual data contained in this document are based on the latest product information available at the time of publication.
We reserve the right to make changes at any time without notice.*

**Check out our website at
WWW.CROWNCABLES.COM
and place your order today!
Distribution All Across Canada**

Distributed By:



Proud to be a
Member of:



Winnipeg, MB
Canada

Toll Free: (877) 909-7278
www.crowncables.com